


## CHOKE COIL

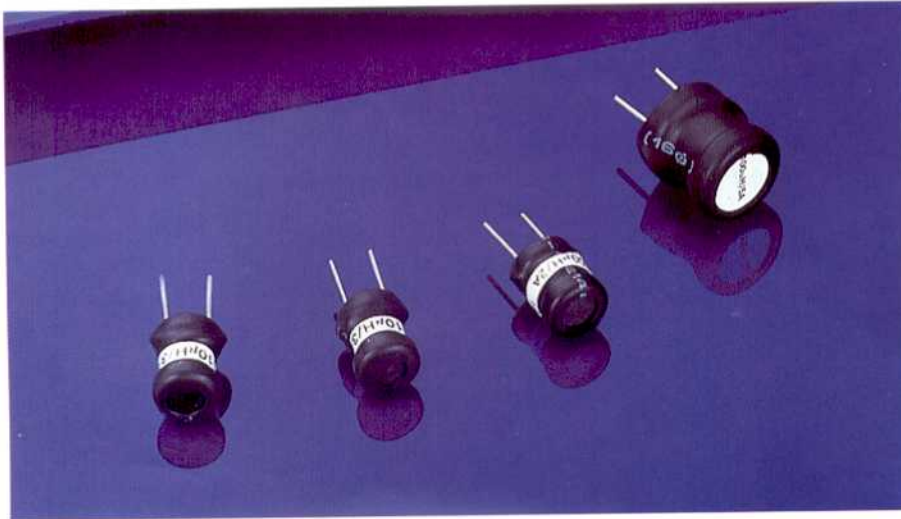

### FEATURES

- Mini size
- Low cost
- High reliability
- Wide inductance range 1.0uh to 1500uh.
- Operating temp. -40°C to +85°C

### APPLICATIONS

- OA equipment
- TVs, CRTs
- Telephone
- Air conditioners
- Other home appliances
- Power supplies

Model No.	Inductance (μH)@1KHz	Q Min.	Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (ohms)	Rated Current Min. (MHz)	Dimensions (mm) TYPE 1
CM-1.00-10	1.0	20	7.9	85.0	0.004	10.00	
CM-1.50-8.3	1.5	20	7.9	64.0	0.005	8.30	
CM-2.20-6.9	2.2	20	7.9	48.0	0.006	6.90	
CM-3.30-5.6	3.3	20	7.9	36.0	0.008	5.60	
CM-4.70-4.7	4.7	20	7.9	28.0	0.009	4.70	
CM-6.80-3.9	6.8	20	7.9	22.0	0.012	3.90	
CM-10.0-3.2	10	20	2.5	16.0	0.016	3.20	
CM-12.0-2.9	12	20	2.5	14.0	0.018	2.90	
CM-15.0-2.6	15	20	2.5	12.0	0.020	2.60	
CM-18.0-2.4	18	20	2.5	11.0	0.025	2.40	
CM-22.0-2.2	22	20	2.5	10.0	0.030	2.20	
CM-27.0-2.0	27	20	2.5	9.0	0.04	2.00	
CM-33.0-1.8	33	20	2.5	8.0	0.05	1.80	
CM-39.0-1.65	39	20	2.5	7.0	0.06	1.65	
CM-47.0-1.5	47	20	2.5	6.0	0.07	1.50	
CM-56.0-1.35	56	20	2.5	5.5	0.08	1.35	
CM-68.0-1.2	68	20	2.5	5.0	0.10	1.20	

## CHOKER COIL

Model No.	Inductance ( $\mu$ H)@1KHz	Q Min.	Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (ohms)	Rated Current Min. (MHz)	Dimensions (mm) TYPE 2
CM-82.0-1.1	82	20	2.5	4.5	0.12	1.10	
CM-100-1.0	100	20	0.79	4.0	0.14	1.00	
CM-120-0.9	120	20	0.79	3.5	0.18	0.90	
CM-150-0.82	150	20	0.79	3.0	0.22	0.82	
CM-180-0.75	180	20	0.79	2.8	0.25	0.75	
CM-220-0.68	220	20	0.79	2.5	0.31	0.68	
CM-270-0.61	270	20	0.79	2.2	0.36	0.61	
CM-330-0.55	330	20	0.79	2.0	0.42	0.55	
CM-390-0.50	390	20	0.79	1.8	0.48	0.50	
CM-470-0.46	470	15	0.79	1.6	0.52	0.46	
CM-560-0.42	560	15	0.79	1.4	0.65	0.42	
CM-680-0.38	680	15	0.79	1.3	0.8	0.38	
CM-820-0.34	820	15	0.79	1.2	1.0	0.34	
CM-1.0K-0.31	1000	20	0.25	1.0	1.5	0.31	
CM-1.2K-0.28	1200	20	0.25	0.9	1.8	0.28	
CM-1.5K-0.25	1500	20	0.25	0.85	2.0	0.25	
CM-1.8K-0.23	1800	20	0.25	0.80	2.5	0.23	
CM-2.2K-0.21	2200	20	0.25	0.75	3.0	0.21	
CM-2.7K-0.19	2700	20	0.25	0.70	3.5	0.19	
CM-3.3K-0.17	3300	20	0.25	0.65	4.0	0.17	
CM-3.9K-0.15	3900	20	0.25	0.60	5.0	0.15	
CM-4.7K-0.14	4700	20	0.25	0.55	6.0	0.14	
CM-5.6K-0.13	5600	20	0.25	0.50	7.5	0.13	
CM-6.8K-0.12	6800	20	0.25	0.45	9.5	0.12	
CM-8.2K-0.11	8200	20	0.25	0.40	11	0.11	
CM-10K-0.10	10000	50	0.079	0.35	12	0.10	
CM-12K-0.09	12000	50	0.079	0.30	13.5	0.09	
CM-15K-0.08	15000	50	0.079	0.25	15	0.08	